# **Test Report**

Report Number: 159664-1-BSC



### DANISH TECHNOLOGICAL

INSTITUTE

Gregersensvej 1 DK-2630 Taastrup +45 72 20 20 00 info@teknologisk.dk www.teknologisk.dk

Page 1 of 3 Init.: CHF/LELN Order no.: 159664

Encl.: 2

Assignor: KVADRAT A/S, Lundbergsvej 10, DK-8400 Ebeltoft

Item: Sample of upholstery fabric designated: B108 by Sahco, colour 0005

Detailed information is given in enclosure A.

Sampling: The assignor confirms having selected the product. The product was forwarded by the

assignor and received at Danish Technological Institute on 14 October 2022.

**Period:** The test took place from 24 October 2022 to 27 October 2022.

Method: BS 5852-1:1979 Fire tests for furniture. Part 1: Methods of test for the ignitability by smokers'

materials of upholstered composites for seating. Source 0 & 1: Cigarette and match flame

Equivalent

**Test results:** According to the requirements specified in Schedule 4, Part I of the Furniture and

Furnishings (Fire)(Safety) Regulations 1988, (amended 1989/1993/2010), (GB), the result is:

Non-ignition > PASSES

The results are shown in enclosure A.

**Terms:** This test was conducted accredited in accordance with international requirements (ISO/IEC

17025:2017) and in accordance with the General Terms and Conditions of Danish

Technological Institute. The test results solely apply to the tested item. This test report may be quoted in extract only if Danish Technological Institute has granted its written consent.

Place: Danish Technological Institute, Taastrup, Environmental Technology

Signature: This document is only valid with a digital signature from Danish Technological Institute. The

date of issue appears from the digital signature.

Charlotte Fischer Senior Consultant



DANISH TECHNOLOGICAL INSTITUTE







## **Materials**

Item: Sample of upholstery fabric designated: B108 by Sahco, colour 0005

Combination of upholstered material tested:

Cover:

Designated: B108 by Sahco, colour 0005 Fibre content: 100% Mohair (nap) Approximate mass per area: 592 g/m<sup>2</sup>

Filling: Non flame-retardant polyurethane foam designated, RP 25145.

Approximate density: 22 kg/m<sup>3</sup>

(Foam was provided by the test laboratory.)

### Results

Test method: BS 5852-1:1979

The samples were tested in accordance with Schedule 4, Part I of the Furniture and Furnishings (Fire)(Safety) Regulations 1988 (amended 1989/1993/2010), (Great Britain).

Ignition source: Smouldering cigarette (Source 0)

Water soaking: Before testing the sample was not subjected to the water soaking and drying as

prescribed in Schedule 5, Part I of the Furniture an Furnishings (Fire)(Safety)

Regulations 1988 (amended 1898/1993/2010), (Great Britain)

Conditioning atmosphere: 23±2 °C / 50±5 % RH

Test result: Non-ignition > PASSES

Observations during test	Cigarette test no.		
	1	2	Comments
The flame ceased within [min]	17	19	
All smouldering ceased within [min]	21	23	
Melting	No	No	
Dripping charring	No	No	
Charring	No	No	
Other phenomena	No	No	

The above test results relate only to the ignitability of the combination of materials under the particular conditions of test; they are not intended as a means of assessing the full potential fire hazard of the materials in use.



# **Photos**

Test of: Sample of upholstery fabric designated: B108 by Sahco, colour 0005



159664-1-BSC Enclosure B, Page 3 of 3

# **Test Report**

Report Number: 159664-2-BSM



### DANISH TECHNOLOGICAL

**INSTITUTE** 

Gregersensvej 1 DK-2630 Taastrup +45 72 20 20 00 info@teknologisk.dk www.teknologisk.dk

Page 1 of 3 Init.: CHF/LELN Order no.: 159664

Encl.: 2

Assignor: KVADRAT A/S, Lundbergsvej 10, DK-8400 Ebeltoft

Item: Sample of upholstery fabric designated: B108 by Sahco, colour 0005

Detailed information is given in enclosure A.

Sampling: The assignor confirms having selected the product. The product was forwarded by the

assignor and received at Danish Technological Institute on 14 October 2022.

**Period:** The test took place from 24 October 2022 to 26 October 2022.

Method: BS 5852-1:1979 Fire tests for furniture. Part 1: Methods of test for the ignitability by smokers'

materials of upholstered composites for seating. Source 0 & 1: Cigarette and match flame

Equivalent

**Test results:** According to the requirements specified in Schedule 5, Part I of the Furniture and

Furnishings (Fire)(Safety) Regulations 1988, (amended 1989/1993/2010), (GB), the result is:

Non-ignition > PASSES

The results are shown in enclosure A.

**Terms:** This test was conducted accredited in accordance with international requirements (ISO/IEC

17025:2017) and in accordance with the General Terms and Conditions of Danish

Technological Institute. The test results solely apply to the tested item. This test report may be quoted in extract only if Danish Technological Institute has granted its written consent.

Place: Danish Technological Institute, Taastrup, Environmental Technology

Signature: This document is only valid with a digital signature from Danish Technological Institute. The

date of issue appears from the digital signature.

Charlotte Fischer Senior Consultant



DANISH TECHNOLOGICAL INSTITUTE







## **Materials**

Item: Sample of upholstery fabric designated: B108 by Sahco, colour 0005

Combination of upholstered material tested:

Cover:

Designated: B108 by Sahco, colour 0005 Fibre content: 100% Mohair (nap) Approximate mass per area: 592 g/m<sup>2</sup>

Filling: Non flame-retardant polyurethane foam designated, RP 25145.

Approximate density: 22 kg/m<sup>3</sup>

(Foam was provided by the test laboratory.)

### Results

Test method: BS 5852-1:1979

The samples were tested in accordance with Schedule 5, Part I of the Furniture and Furnishings (Fire)(Safety) Regulations 1988 (amended 1989/1993/2010), (Great Britain).

Ignition source: Match flame equivalent (Source 1)

Water soaking: Before testing the sample was not subjected to the water soaking and drying as

prescribed in Schedule 5, Part I of the Furniture an Furnishings (Fire)(Safety)

Regulations 1988 (amended 1898/1993/2010), (Great Britain)

Conditioning atmosphere: 23±2 °C / 50±5 % RH

Test result: Non-ignition > PASSES


Observations during test	Flame test no.		
	1	2	Comments
The flame ceased within [min]	0	0	
All smouldering ceased within [min]	0	0	
Melting	No	No	
Dripping charring	No	No	
Charring	No	No	
Other phenomena	No	No	

The above test results relate only to the ignitability of the combination of materials under the particular conditions of test; they are not intended as a means of assessing the full potential fire hazard of the materials in use.



# **Photos**

Test of: Sample of upholstery fabric designated: B108 by Sahco, colour 0005

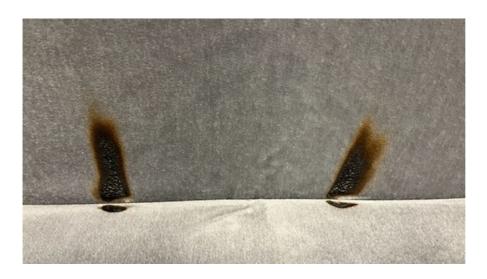

159664-2-BSM Enclosure B, Page 3 of 3