

EN 29053 - Determination of airflow resistance

Direct airflow method - method A

Client: Kvadrat


Date: 31-01-20

Type: Gentle 2
Colour: 553 & 183
Order:
Batch:
Manufacturer: Febrik

60% new wool
20% nylon
20% polyester

Specimen Diameter: 100 mm
Thickness: 3.05 mm
Area specific mass: 592 g/m²

u_l (mm/s)	$R_{s,l}$ (Pa s/m)
16.53	266
14.16	269
11.80	269
9.44	271
7.12	271
4.80	268

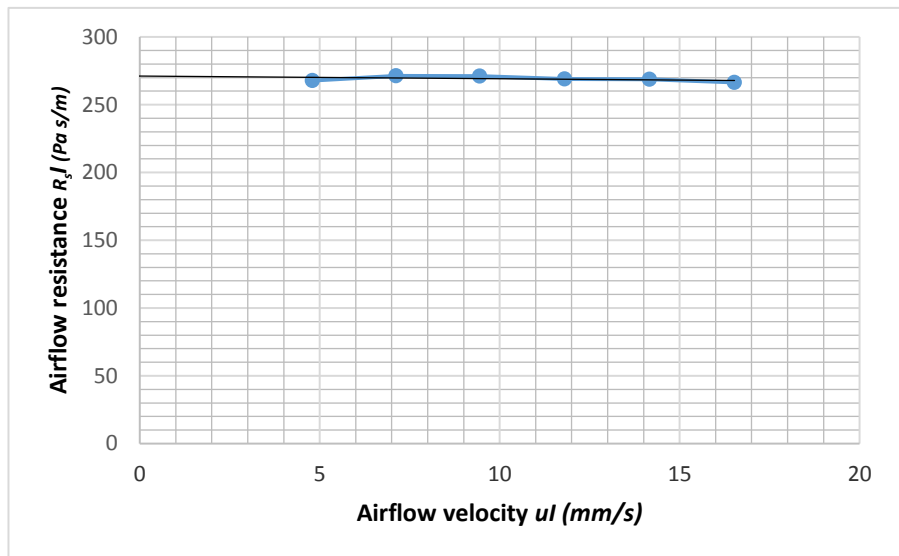

Airflow Resistance

$R_s = 271$ Pa s/m