

# Test Report

Report Number:  
139553-2-TEX



**DANISH  
TECHNOLOGICAL  
INSTITUTE**

Gregersensvej 1  
DK-2630 Taastrup  
+45 72 20 20 00  
info@teknologisk.dk  
www.teknologisk.dk

Page 1 of 3  
Init.: CHF/LELN  
Order no.: 139553  
Encl.: 0

**Assignor:** KVADRAT A/S, Lundbergsvej 10, DK-8400 Ebeltoft

**Material:** Sample of fabric designated: Sport. See page 2 for detailed sample description.

**Sampling:** The assignor confirms having selected the product. The product was forwarded by the assignor and received at Danish Technological Institute on 19 May 2022.

**Period:** The test took place from 23 May 2022 to 31 May 2022.

**Method:** The test methods used are referenced in connection with the results. See page 3.

**Test results:** The results are shown from page 3 onwards.

**Terms:** This test was conducted accredited in accordance with international requirements (ISO/IEC 17025:2017) and in accordance with the General Terms and Conditions of Danish Technological Institute. The test results solely apply to the tested item. This test report may be quoted in extract only if Danish Technological Institute has granted its written consent.

**Place:** Danish Technological Institute, Taastrup, Environmental Technology

**Signature:** This document is only valid with a digital signature from Danish Technological Institute. The date of issue appears from the digital signature.

Charlotte Fischer  
Senior Consultant



DIGITALLY SIGNED DOCUMENT

31 May 2022

DANISH TECHNOLOGICAL INSTITUTE



**DANAK**


TEST Reg.no. 2



## Sample

Description: Upholstery fabric  
Designated: Sport  
Fibre content: 100% ocean bound recycled polyester  
Approximate mass per area: 302 g/m<sup>2</sup>

Photo:

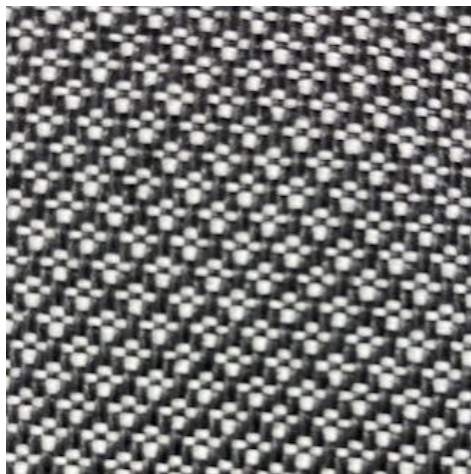



## Results

### *Test of Sample of fabric designated: Sport*

---

#### Determination of the slippage resistance of yarns at a seam in woven fabrics - Fixed load method

EN ISO 13936-2:2004

Test conditions: 21°C, 65% RH

Performed on	Load [N]	Seam parallel to warp	Seam parallel to weft
Standard seam	180	3 mm seam opening <i>Average of 5 determinations</i>	3 mm seam opening <i>Average of 5 determinations</i>

---