

EN 29053 - Determination of airflow resistance

Direct airflow method - method A


Client: Kvadrat

Date: 25-02-20

Type: Uniform Melange 68% new wool
Colour: 22% nylon
Order: 10% polyester
Batch:
Manufacturer: Febrik

Specimen Diameter: 100 mm
Thickness: 3.49 mm
Area specific mass: 583 g/m²

u_l (mm/s)	$R_{s,l}$ (Pa s/m)
16.53	61
14.16	62
11.80	65
9.44	66
7.12	65
4.80	64

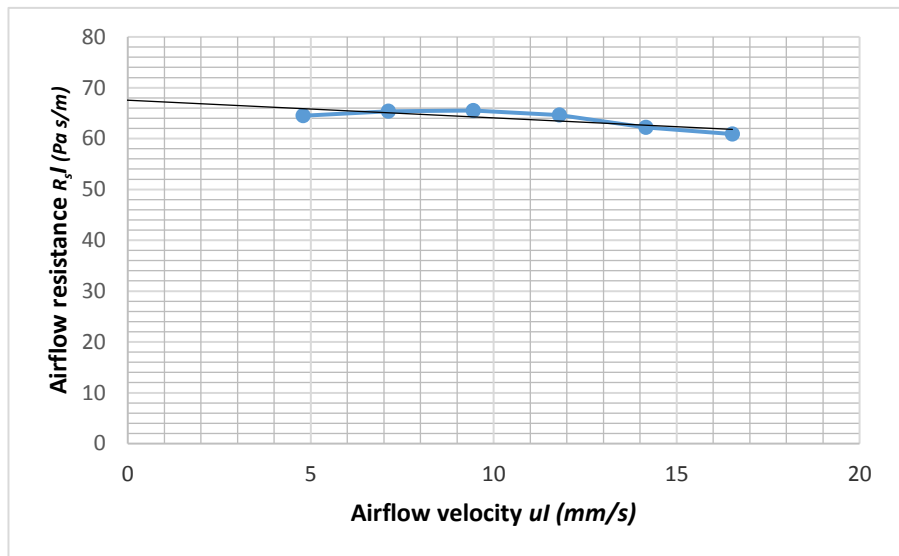

Airflow Resistance

$R_s = 67$ Pa s/m