


# SAHCO

1831

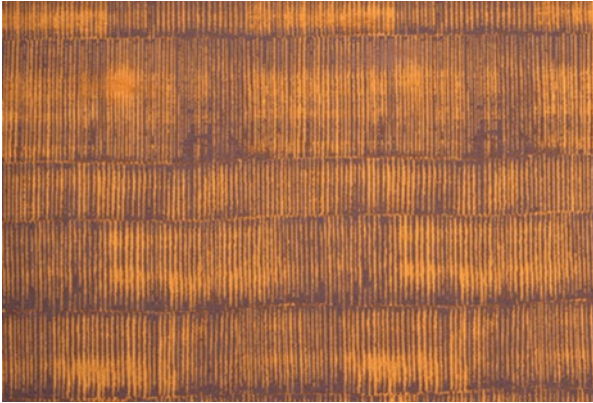

## Assam

Type: Upholstery

Composition: 6% polyacrylic, 13% cotton, 33% nylon, 22% polyester, 26% viscose

Yarn type: Staple / Filament

Binding: Jacquard

Width: Approx. 136 cm, 54 inches

Weight: Approx. 590 g/lin.m, 19 oz/ly

Repeat: Approx. 72 cm, 28 inches Vertical /  
34 cm, 13 inches Horizontal

Colour difference may occur

Cleaning: Vacuum clean frequently, ideally every week.

Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water based glue. Pay attention to temperature and amount of cleaning fluid.

Disinfection, see [www.kvadrat.dk/en/sahco](http://www.kvadrat.dk/en/sahco)



2 year  
warranty



## Abrasion

Approx. 80.000 Martindale rubs, EN ISO 12947

*Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention*

## Lightfastness

Note 6-7 ISO 105-B02

## Fastness to rubbing

Dry note 5 ISO 105-X12

Wet note 4-5 ISO 105-X12

## Flame resistance

EN 1021-1

BS 5852 Crib 5 with treatment \*

BS 5852 Part 1 ignition source 0

NFPA 260

US Cal. Bull. 117-2013

Free from added flame-retardant chemicals as standard

*\* To pass this test flame retardant treatment is necessary.*

*We are looking into more environmental friendly alternatives but for now, the external finisher may use a treatment containing halogen-based flame retardants*

# SAHCO

1831

## **ACT Guidelines Woven fabrics**

### **Flammability**

US Cal. Bull. 117-2013

### **Dry & Wet Crocking AATCC 8**

Dry Crocking: Grade 5.0

Wet Crocking: Grade 4.5

### **Colour Fastness to Light AATCC 16**

Grade 5.0 minimum 40 hours

### **Physical properties**

Pilling ASTM D3511 Class 5.0

Breaking Strength ASTM D5034 warp 345 / weft 188 lbs

Seam Slippage ASTM D4034 warp 97 / weft 80 lbs

### **Abrasion ASTM D4966**

80.000 cycles Martindale – High Traffic

## **Environmental benefits**

Follow the EU Ecolabel dye restrictions incl. AZO dye and heavy metal restrictions

No use of halogen based flame retardants (incl. brominated and chlorinated)

REACH compliant

Californian Proposition 65 list compliant

LBC Red list compliant

## **Green building certificates**

Greenguard Gold: Low chemical emission

Health Product Declaration (HPD): Declaring textile content and substance

## **Country of origin**

India

## **Launch**

2015

## **Warranty**

2 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard material is FSC certified and / or contains recycled content.

For further information

[www.kvadrat.dk/en/sahco](http://www.kvadrat.dk/en/sahco)