

# KVADRAT/RAF SIMONS

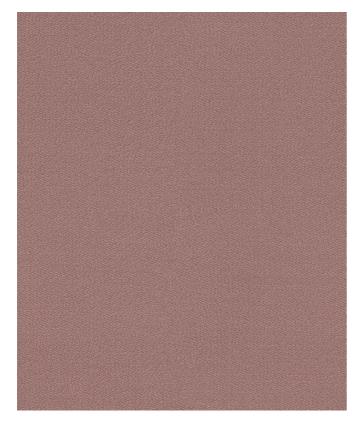

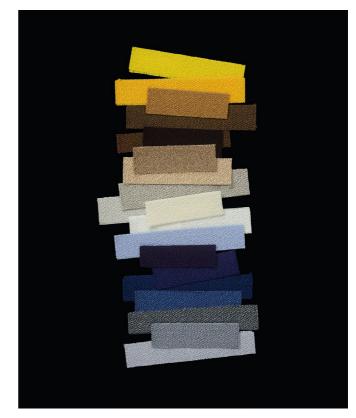

### VIDAR 4

Design: Raf Simons

Type: Upholstery

Composition: 94% new wool, 6% nylon

Yarn type: Woollen Binding: Crepe weave

Width: Approx. 140 cm, 55 inches Weight: Approx. 770 g/lin.m, 24.7 oz/ly

Repeat: None

Colour difference may occur

Foreign fibers may occur in light colours

Cleaning: Vacuum clean frequently, ideally every week. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary.

Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.

Disinfection, see kvadrat.dk

More info: Care and maintenance kvadrat.dk

10 year warranty











# **Abrasion**

Approx. 100.000 Martindale rubs, EN ISO 12947

Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention

# **Pilling**

Note 4, EN ISO 12945

# Seam slippage

Seam parallel to warp: 5.5 mm parallel to weft: 7.0 mm EN ISO 13 936-2 180 Newton

# **Lightfastness**

Note 5-7 ISO 105-B02

# Fastness to rubbing

Dry note 3-5 ISO 105-X12 Wet note 3-5 ISO 105-X12

# **Absorption**

0.55/Class D (flat) EN ISO 354

### <u>Airflow</u>

367 Pa s/m EN 29053

Flame resistance

AS/NZS 1530.3

AS/NZS 3837 class 2

BS 5852 crib 5 with treatment \*

BS 5852 part 1 EN 1021-1/2

IMO FTP Code 2010 Part 7 with treatment \*

IMO FTP Code 2010 Part 8

NF D 60 013 NFPA 260

NFPA 701 with treatment  $^{\ast}$ 

SN 198 898 5.3 with treatment \*

**UNI 9175 1IM** 

US Cal. Bull. 117-2013

Free from added flame-retardant chemicals as standard

\* To pass this test flame retardant treatment is necessary. We are looking into more environmentally friendly alternatives but for now, the external finisher may use a treatment containing halogen-based flame retardants

#### **ACT Guidelines Woven fabrics**

<u>Flammability</u>

US Cal. Bull. 117-2013

Dry & Wet Crocking
Dry Crocking: Grade 4.5
Wet Crocking: Grade 4.0

Colour Fastness to Light Grade 5.0 minimum 40 hours

Physical properties

Pilling Class 4

Breaking Strength warp 154 / weft 204 lbs. Seam Slippage warp 101 / weft 82.5 lbs.

**Abrasion** 

100.000 cycles Martindale - High Traffic / Public Spaces

Benefits of wool

Wool is a renewable resource

Wool is very comfortable because of its ability to absorb/

give off humidity

Wool is flame retardant

Wool is biodegradable

Wool is naturally soil resistant

Wool ages with grace

**Quality benefits** 

Complies with Möbelfakta

Very good abrasion Good lightfastness

Flame retardant

**Environmental benefits** 

EU Ecolabel compliant

No content of PFCs or 'PFAS'

**REACH** compliant

Californian Proposition 65 list compliant

LBC Red list compliant

Healthier Hospitals compliant

**Green building certificates** 

Greenguard Gold: Low chemical emission

Health Product Declaration (HPD): Declaring textile content

and substance

Country of origin

Norway

Warranty

10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable.

Cardboard material is FSC certified and / or contains

recycled content.

For further information

kvadrat.dk