


SAHCO

1831

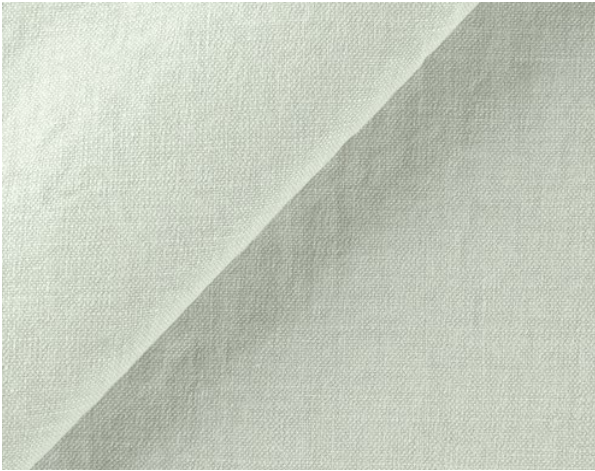

Levino

Type: Upholstery

Composition: 91% linen, 9% nylon

Yarn type: Staple

Binding: Plain

Width: Approx. 140 cm, 55 inches

Weight: Approx. 750 g/lin.m, 24 oz/ly

Repeat: None

Foreign fibers may occur

Colour difference will occur

Cleaning: Vacuum clean frequently, ideally every week. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water based glue. Pay attention to temperature and amount of cleaning fluid. Also washable at 30°C, half wash load. Drip drying. Mount in moist condition. Shrinkage app. 1% at 30°C. Be aware of increased shrinking and creasing the higher the temperature.

Disinfection, see kvadrat.dk/en/sahco

More info: Care and maintenance kvadrat.dk



2^{year}
warranty



Abrasion

Approx. 65.000 Martindale rubs, EN ISO 12947

Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention

Pilling

Note 3-4, EN ISO 12945

Seam slippage

Seam parallel to warp: 2.0 mm, parallel to weft: 2.0 mm

EN ISO 13 936-2 180 Newton

Lightfastness

Note 4 ISO 105-B02

Fastness to rubbing

Dry note 4 ISO 105-X12

Wet note 3-4 ISO 105-X12

Flame resistance

BS 5852 Crib 5 with treatment *

Bs 5852 part 1

US Cal. Bull. 117-2013 with Cal. 117 compliant interliner

** To pass this test flame retardant treatment is necessary.*

We are looking into more environmental friendly alternatives but for now the external finisher may use a treatment containing halogen based flame retardants.

SAHCO

1831

ACT Guidelines Woven fabrics

Flammability

US Cal. Bull. 117-2013 with Cal. 117 compliant interliner

Dry & Wet Crocking AATCC 8

Dry Crocking: Grade 5.0

Wet Crocking: Grade 5.0

Colour Fastness to Light AATCC 16

Grade 3.5 minimum 40 hours

Physical properties

Pilling ASTM D3511 Class 5

Breaking Strength ASTM D5034 warp 126 / weft 99 lbs

Seam Slippage ASTM D4034 warp 87 / weft 74 lbs

Abrasion ASTM D4966

65.000 cycles Martaindale – High Traffic

Characteristics of linen

Minor irregularities such as knots or slubs

Fabric including vegetable parts

Environmental benefits

Follow the EU Ecolabel dye restrictions incl. AZO dye and heavy metal restrictions

REACH compliant

Californian Proposition 65 list compliant

LBC Red list compliant

Green building certificates

Greenguard Gold: Low chemical emission

Health Product Declaration (HPD): Declaring textile content and substance

Country of origin

Belgium

Launch

2016

Warranty

2 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard material is FSC certified and / or contains recycled content.

For further information

www.kvadrat.dk/en/sahco