


SAHCO

1831

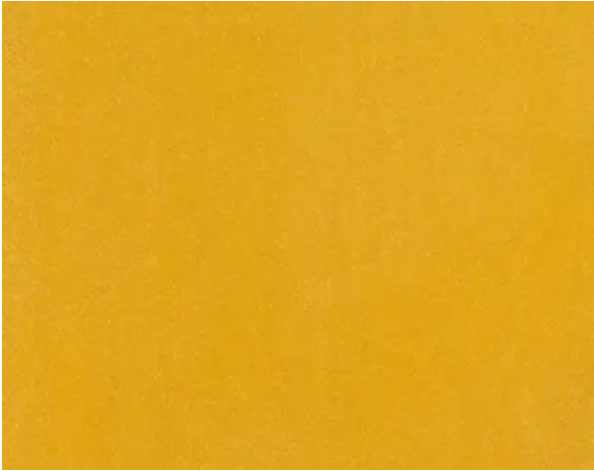

Avalon 2

Type: Upholstery

In accordance with California Bill AB 2998 and similar legislation within the United States, this product may not be used as upholstery. It can be used for vertical applications.

Composition: 100% Trevira CS

Yarn type: Filament

Binding: Velvet

Width: Approx. 140 cm, 55 inches

Weight: Approx. 720 g/lin.m, 23 oz/ly

Repeat: None

Colour difference may occur

Cleaning: Vacuum clean frequently, ideally every week. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water based glue. Pay attention to temperature and amount of cleaning fluid. Also washable at 30°C, half wash load. Drip drying. Mount in moist condition. Shrinkage app. 1% at 30°C. Be aware of increased shrinking and creasing the higher the temperature. Velour/chenille fabrics should be vacuumed in the nap direction
Disinfection, see kvadrat.dk/en/sahco
More info: Care and maintenance kvadrat.dk

Abrasion

Approx. 100.000 Martindale rubs, EN ISO 12947

Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention

Pilling

Note 4-5, EN ISO 12945

Seam slippage

Seam parallel to warp: 1.9 mm parallel to weft: 1.3 m
EN ISO 13 936-2 180 Newton

Lightfastness

Note 5-6 ISO 105-B02

Fastness to rubbing

Dry note 4-5 ISO 105-X12

Wet note 4-5 ISO 105-X12

Absorption

0.40/Class D (flat), 0.65/Class C (waved) EN ISO 354

Airflow

7299 Pa s/m EN 29053



10 year
warranty



0575/26

Acoustic



SAHCO

1831

Flame resistance

AS NZS 1530.2
AS NZS 1530.3
AS NZS 3837 class 1
ASTM E84 Class A Unadhered
BS 5852 Crib 5
BS 5867 part 2 type B
CAN ULC S102
CAN ULC S109
DIN 4102 B1
EN 1021-1/2
EN 13501-1, B-s1, do
GB 8624 B1
IMO FTP Code 2010 Part 5
IMO FTP Code 2010 Part 8
NF P 92 507 M1
NFPA 701
SN 198 898 5.2
UNI 9175 1IM
UNI 9177 Classe 1
US Cal. Bull. 117-2013

ACT Guidelines Woven fabrics

Flammability

US Cal. Bull. 117-2013

Dry & Wet Crocking AATCC 8

Dry Crocking: Grade 4.5
Wet Crocking: Grade 4.5

Colour Fastness to Light AATCC 16

Grade 5.0 minimum 40 hours

Physical properties

Pilling ASTM D3511 Class
Breaking Strength ASTM D5034 warp 127 / weft 193 lbs
Seam Slippage ASTM D4034 warp 112 / weft 104 lbs

Abrasion ASTM D4966

100.000 cycles Martaindale – High Traffic / Public spaces

Quality benefits

Complies with Möbelfakta
Very good abrasion
Good lightfastness
Permanent flame retardant

Environmental benefits

Follow the EU Ecolabel dye restrictions incl. AZO dye and heavy metal restrictions
No use of halogen based flame retardants (incl. brominated and chlorinated)
No content of PFCs or 'PFAS'
REACH compliant
Californian Proposition 65 list compliant
LBC Red list compliant

Green building certificates

Greenguard Gold: Low chemical emission
Health Product Declaration (HPD): Declaring textile content and substance

Country of origin

Italy

Launch

2020

Warranty

10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard material is FSC certified and / or contains recycled content.

For further information

kvadrat.dk/en/sahco