


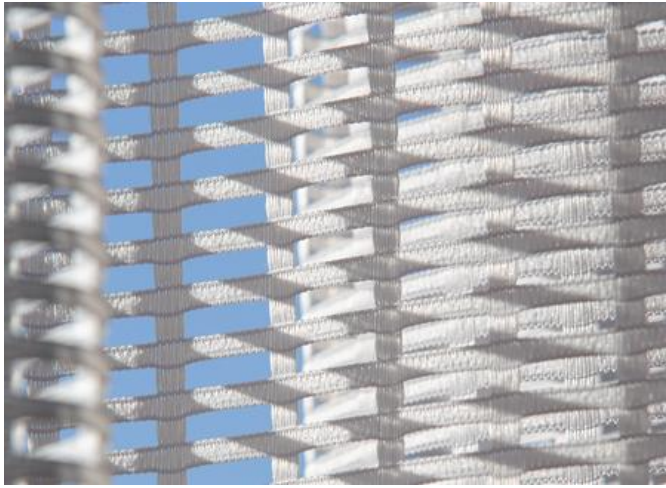

Magnet

Lightfastness

Note 4-7 ISO 105-B02

Flame resistance

AS/NZS 1530.3

BS 5867 part 2 type B

DIN 4102 B1

EN 13 773 class 1

NF P 92 507 M1

NFPA 701

UNI 9177 Classe 1

ACT Guidelines Woven fabrics

Flammability

NFPA 701

Magnet

Design: Kvadrat Residential

Type: Curtain

Composition: 100% recycled polyester FR

Yarn type: Staple

Binding: Warp knitted

Width: Approx. 290 cm, 114" inches

Weight: Approx. 410 g/m, 13 oz/y

Repeat: None

Colour difference may occur

Cleaning: Follow the ISO symbols


Drip drying

Shrinkage warp approx. 0%, weft approx. 0%

Ironing might be necessary.

Disinfection, see www.kvadrat.dk

More info: Care and maintenance kvadrat.dk

30/ 

10^{year}
warranty



kvadrat

Environmental benefits

Follow the EU Ecolabel dye restrictions incl. AZO dye
and heavy metal restrictions
No use of halogen-based flame retardants (incl. brominated
and chlorinated)
REACH compliant
Californian Proposition 65 list compliant
LBC Red list compliant
Free of intentionally PFAS
Mono-material designed for circularity
Recyclable

Green Building certificates

Greenguard Gold: Low chemical emission
Health Product Declaration (HPD): Declaring textile content
and substance

Country of origin

Turkey

Warranty

10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard
material is FSC certified and / or contains recycled content.

Kvadrat A/S is ISO 9001 and ISO 14001 certified


For further information
kvadrat.dk

kvadrat


Processing the curtain fabric Magnet

Magnet features an open yet stable warp-knit structure inspired by a magnified net, creating a bold architectural and graphic look. Due to its open-grid and flexible construction, the fabric requires careful handling during confection to ensure proper alignment and the intended final appearance.

Before confection, all selvedge's must be cut off.

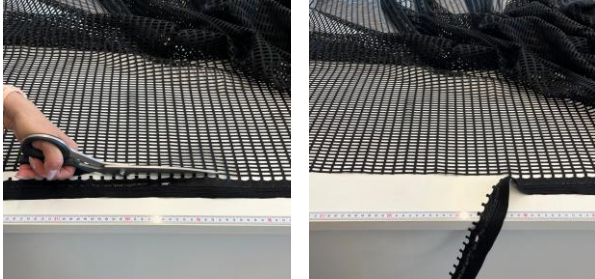

Cutting must follow the fabric grid/thread line precisely. It is recommended to check the alignment panel by panel before final hemming.

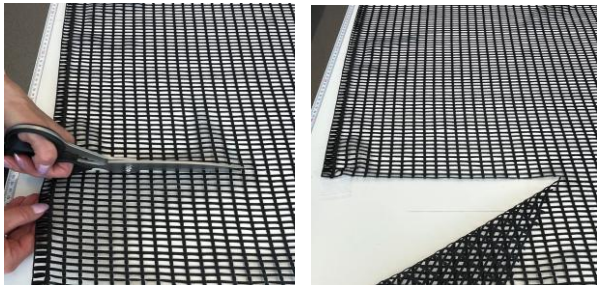

Sewing:


The pre-fixation of fold with pins is advisable for achieving the correct alignment.

Hemline workmanship is recommended with covering the fabric edge with overlock and folding one time to backside with stitching on top.


Side seam workmanship is recommended in 2 styles:

a) Covering the fabric edge with overlock and being folded to backside once time with stitching on top.

b) Hiding the fabric edge folds twice to backside with stitching on top.

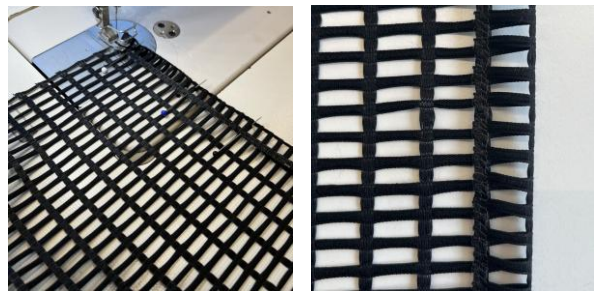

Topline workmanship is recommended with covering the fabric edge with overlock and folding 1 time to backside. The confection pleating tape is stitched on top of folding to cover it.

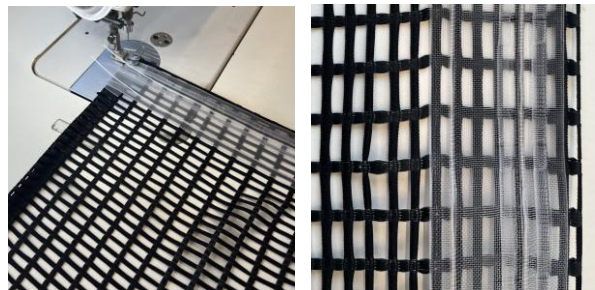

Manual ironing (one dot with no steam) can help to correct the minor distortions and movements if occurred.