


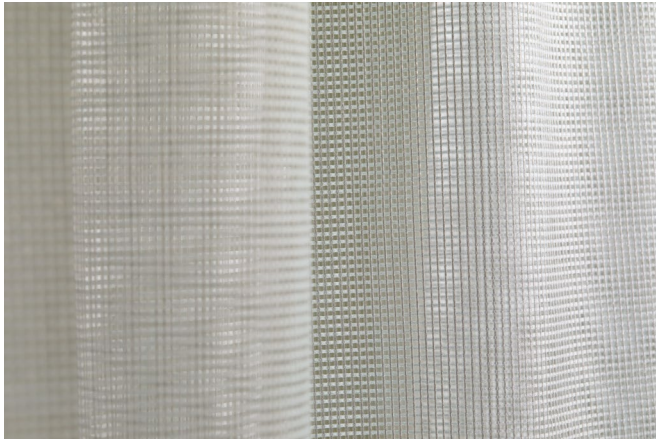

Aerio

Design: Kinnasand

Type: Curtain

Composition: 65% recycled polyester FR, 30% polyester FR, 5% polyester

Yarn type: Filament

Binding: Dobby

Width: Approx. 322 cm, 127 inches

Weight: Approx. 205 g/lin.m, 7 oz/ly

Repeat: None

Colour difference may occur

Cleaning: Washing at max. 60°C.

Drip drying.

Shrinkage approx. 1% / 0% when washed at 60°C.

Ironing might be necessary.

Disinfection, see www.kvadrat.dk

More info: Care and maintenance kvadrat.dk



10^{year}
warranty



Aerio

Lightfastness

Note 6-7 ISO 105-B02

Airflow

<10 Pa s/m EN 29053

Flame resistance

AS/NZS 1530.3

BS 5867 part 2 type B

DIN 4102 B1

EN 13 773 class 1

JIS L 1091 A-1 D

NFPA 701

ACT Guidelines Woven fabrics

Flammability

NFPA 701

Dry & Wet Crocking AATCC 8

Dry Crocking: Grade 5.0

Wet Crocking: Grade 4.5

Colour Fastness to Light AATCC 16

Grade 5.0 minimum 60 hours

Physical properties

Seam Slippage ASTM D434

Not required fabric under weight

Quality benefits

Very good lightfastness

Permanent flame retardant

Washable

Benefits of polyester FR

Polyester FR has hypoallergenic properties

Polyester FR dries fast

Polyester FR is inherently flame retardant, so no additional chemical treatment is needed

Environmental benefits

Recycled content

Follow the EU Ecolabel dye restrictions incl. AZO dye and heavy metal restrictions

REACH compliant

Californian Proposition 65 list compliant

LBC Red list compliant

Green Building certificates

Greenguard Gold: Low chemical emission

Health Product Declaration (HPD): Declaring textile content and substance

Country of origin

Italy

Warranty

10 years. See terms and conditions on www.kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard material is FSC certified and / or contains recycled content.

Kvadrat A/S is ISO 9001 and ISO 14001 certified

For further information

kvadrat.dk

kvadrat