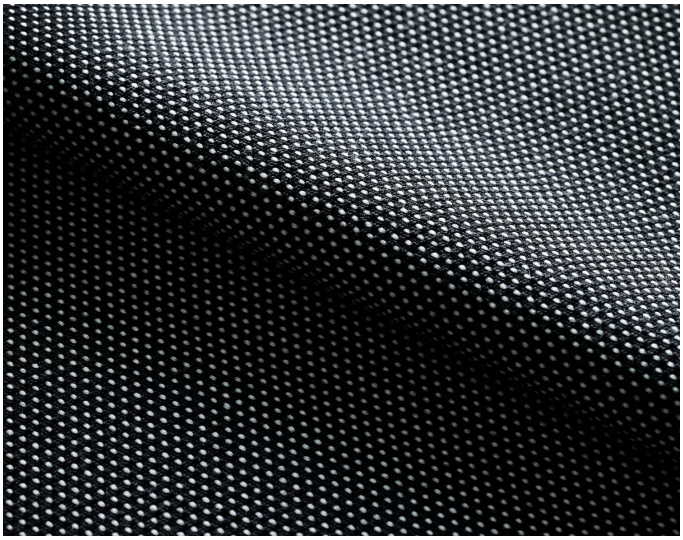


Basel INDEX
Design: Herzog & de Meuron

Type: Upholstery
Composition: 90% wool, 10% nylon
Yarn type: Worsted
Binding: Plain variant
Width: Approx. 140 cm, 55 inches
Weight: Approx. 510 g/lin.m, 16.5 oz/ly
Repeat: None

Colour difference may occur

Cleaning: Vacuum clean frequently, ideally every week. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.

Disinfection, see kvadrat.dk

More info: Care and maintenance kvadrat.dk

10 year warranty

Basel INDEX

Abrasion
Approx. 50.000 Martindale rubs, EN ISO 12947

Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention

Pilling
Note 4 EN ISO 12945

Seam slippage
Basel 127/187
Seam parallel to warp: 1.0 mm, parallel to weft: 2.0 mm
Basel 129/189
Seam parallel to warp: 2.0 mm, parallel to weft: 3.0 mm
EN ISO 13 936-2 180 Newton

Lightfastness
Note 6-7 ISO 105-B02

Fastness to rubbing
Dry note 4-5 ISO 105-X12
Wet note 4-5 ISO 105-X12

Airflow
180-1134 Pa s/m depending on colour.

Flame resistance
ASTM E 84 Class A adhered
ASTM E84 Class A unadhered
AS/NZS 3837 class 2
BS 5852 crib 5 with treatment *
BS 5852 part 1
BS 7176 Low Hazard
EN 1021-1/2
IMO FTP Code 2010 Part 8
NF D 60 013
NFPA 260
ÖNORM B1/Q1
SN 198 898 5.2 with treatment *
UNI 9175 1IM
US Cal. Bull. 117-2013

Free from added flame-retardant chemicals as standard

** To pass this test flame retardant treatment is necessary. We are looking into more environmentally friendly alternatives but for now, the external finisher may use a treatment containing halogen-based flame retardants*

kvadrat

ACT Guidelines Woven fabrics

Flammability
US Cal. Bull. 117-2013

Dry & Wet Crocking
Dry Crocking: Grade 4.5
Wet Crocking: Grade 4.5

Colour Fastness to Light
Grade 4.5 minimum 40 hours

Physical properties
Pilling Class 4
Breaking Strength warp 148 / weft 164 lbs.
Seam Slippage warp 153.5 / weft 51 lbs.

Abrasion
50.000 cycles Martindale – High Traffic / Public Spaces

Quality benefits
Complies with Möbelfakta

Environmental benefits
EU Ecolabel compliant
Free of intentionally added PFAS
REACH compliant
Californian Proposition 65 list compliant
LBC Red list compliant
Healthier Hospitals Compliant

Green building certificates
Greenguard Gold: Low chemical emission
Environmental Product Declaration (EPD): Based on a LCA following EN 15804 and follow the standard of ISO 14040
Health Product Declaration (HPD): Declaring textile content and substance

Country of origin
United Kingdom

Launch
2013

Warranty
10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard material is FSC certified and / or contains recycled content.

For further information
kvadrat.dk

kvadrat