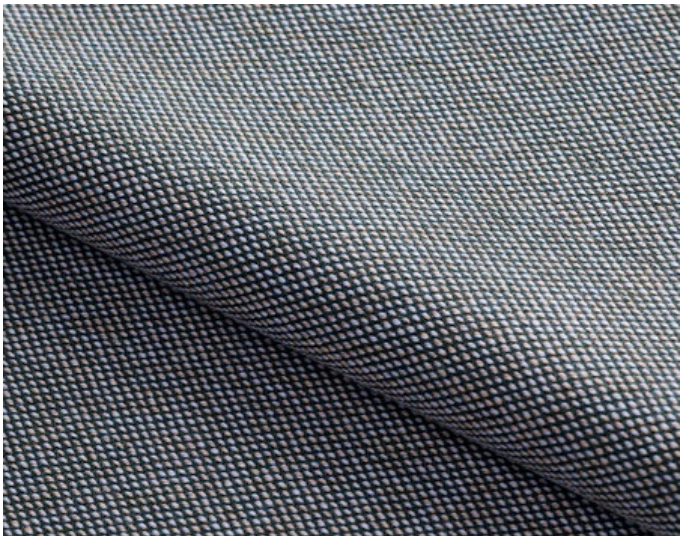


Steelcut Quartet
Design: Frans Dijkmeijer & Giulio Ridolfo

Type: Upholstery
Composition: 90% new wool, 10% nylon
Yarn type: Worsted
Binding: Semi-plain
Width: Approx. 140 cm, 55 inches
Weight: Approx. 770 g/lin.m, 24.8 oz/ly
Repeat: None

Foreign fibres may occur
Colour difference may occur

Cleaning: Vacuum clean frequently, ideally every week. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.

Disinfection, see kvadrat.dk

More info: Care and maintenance kvadrat.dk

10 year warranty

Steelcut Quartet

Abrasion
Approx. 100.000 Martindale rubs, EN ISO 12947

Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention

Pilling
Note 4-5, EN ISO 12945

Seam slippage
Seam parallel to warp: 3.5 mm parallel to weft: 2.0 mm

Lightfastness
Note 6-7 ISO 105-B02

Fastness to rubbing
Dry note 4-5 ISO 105-X12
Wet note 4-5 ISO 105-X12

Absorption
0.70/Class C (flat), 0.95/Class A (waved) EN ISO 354

Airflow
910 Pa s/m EN 29053

Flame resistance
AS/NZS 1530.3
AS/NZS 3837 class 2
ASTM E84 Class A Unadhered
ASTM E84 Class B Adhered
ASTM E84 Class A Adhered with treatment (AB 2998 compliant)
BS 5852 Crib 5 with treatment *
BS 5852 Part 1
BS 7176 Low Hazard
BS EN 13501-1 B, s2 d1 with treatment *
EN 1021-1/2
IMO FTP Code 2010:Part 8
NF D 60 013
NFPA 260
NFPA 701 with treatment (AB 2998 compliant)
ÔNORM B1/Q1
SN 198 898 5.3 with treatment *
UNI 9175 1IM
US Cal. Bull. 117-2013

Free from added flame-retardant chemicals as standard

** To pass this test flame retardant treatment is necessary. We are looking into more environmental friendly alternatives but for now the external finisher may use a treatment containing halogen based flame retardants*

kvadrat

ACT Guidelines Woven fabrics

Flammability
US Cal. Bull. 117-2013

Dry & Wet crocking
Dry Crocking: Grade 4.5-5.0
Wet Crocking: Grade 4.0-5.0

Colour Fastness to Light
Grade 4.5-5.0 40 hours

Physical properties
Pilling Class 4-5
Breaking strength warp 263 / weft 142 lbs.
Seam slippage warp 127 / weft 58 lbs.

Abrasion
100.000 cycles Martindale – High Traffic / Public Spaces

Quality benefits
Complies with Möbelfakta

Environmental benefits
EU Ecolabel compliant
No use of halogen-based flame retardants (incl. brominated and chlorinated)
REACH compliant
Californian Proposition 65 list compliant
LBC Red list compliant
Healthier Hospitals compliant

Green building certificates
Greenguard Gold: Low chemical emission
Health Product Declaration (HPD): Declaring textile content and substance

Country of origin
United Kingdom

Warranty
10 years. See terms and conditions on kvadrat.dk

Launch
2022

Kvadrat packaging and cardboard is recyclable. Cardboard material is FSC certified and / or contains recycled content.

For further information
kvadrat.dk

kvadrat