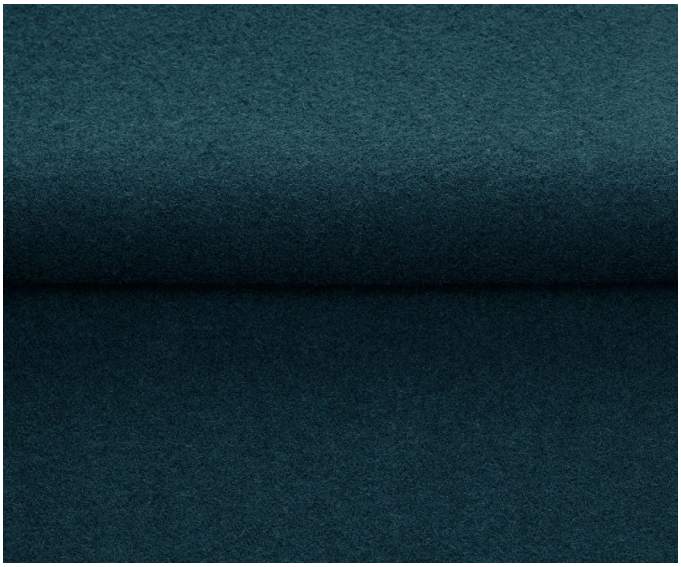


Hero 2
Design: Patricia Urquiola

Type: Upholstery, panel fabric
Composition: 97% new wool, 3% recycled nylon
Yarn type: Worsted / Woollen
Binding: Devon weave
Width: Approx. 140 cm, 55 inches
Weight: Approx. 580 g/lin.m, 18.7 oz/ly
Repeat: None

Foreign fibers may occur
Colour difference may occur

Cleaning: Vacuum clean frequently, ideally every week. Remove stains as soon as they occur, with clean warm water or sparkling water. Please be aware that stain removal will cause a darker area as the wool fibers rise when exposed to water. This can only be reduced by gentle atomizing water over the entire furniture.
Extraction clean when necessary. Avoid using steam.

More info: Care and maintenance kvadrat.dk

10 year warranty

Hero 2

Abrasion
Approx. 45.000 Martindale rubs, EN ISO 12947

Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention

Pilling
Note 3-4, EN ISO 12945

Seam slippage
Seam parallel to warp: 1.5mm parallel to weft: 2.0 mm
EN ISO 13 936-2 180 Newton

Lightfastness
Note 5-6 ISO 105-B02

Fastness to rubbing
Dry note 4-5 ISO 105-X12
Wet note 3-5 ISO 105-X12

Absorption
0.55/Class D (flat), 0.80/Class B (folded) EN ISO 354

Airflow
380 Pa s/m EN 29053

Flame resistance
AS/NZS 1530.3
AS/NZS 3837 class 2
ASTM E84 Class A Unadhered
ASTM E84 Class B Adhered
BS 5852 crib 5 with treatment *
BS 5852 part 1
BS 5867 part 2 type B with treatment *
CAN ULC S102
EN 1021-1/2
EN 13501 B-s2, d0 with treatment *
EN 13 773 class 1 with treatment *
IMO FTP Code 2010 Part 8
NF D 60 013
NFPA 260
NFPA 701 with treatment *
ÔNORM B1/Q1
SN 198 898 5.3 with treatment *
UNI 9175 1IM
US Cal. Bull. 117-2013

Free from added flame retardant chemicals as standard

** To pass this test flame retardant treatment is necessary. We are looking into more environmentally friendly alternatives but for now, the external finisher may use a treatment containing halogen-based flame retardants*

kvadrat

ACT Guidelines Woven fabrics

Flammability
US Cal. Bull. 117-2013

Dry & Wet Crocking
Dry Crocking: Grade 4.5-0.5
Wet Crocking: Grade 4.5-0.5

Colour Fastness to Light
Grade 4.0 minimum 40 hours

Physical properties
Pilling Class 3-4
Breaking Strength warp 136 / weft 63 lbs.
Seam Slippage warp 144 / weft 67 lbs.

Abrasion
45.000 cycles Martindale – High Traffic / Public Spaces

Benefits of wool
Wool is a renewable resource
Wool is very comfortable because of its ability to absorb/ give off humidity
Wool is flame retardant
Wool is biodegradable
Wool is naturally soil resistant
Wool ages with grace

Quality benefits
Complies with Möbelfakta
Very good abrasion
Good lightfastness
Flame retardant

Environmental benefits
EU Ecolabel compliant
Free of intentionally added PFAS
REACH compliant
Californian Proposition 65 list compliant
LBC Red list compliant
Healthier Hospital compliant

Green building certificates
Greenguard Gold: Low chemical emission
Health Product Declaration (HPD): Declaring textile content and substance

Country of origin
United Kingdom

Launch:
2022

Warranty
10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard material is FSC certified and / or contains recycled content.

For further information
kvadrat.dk

kvadrat