

# Simulation of Sound Absorption Coefficient as per ISO 354

Computational model\* of absorption measurement in reverberation rooms

**Client** Kvadrat  
**Test Specimen** Curtains  
 Type: Flat

## Arrangement: Flat hanging

1 layer of textile, flat arrangement  
 Distance to the wall: 100 mm

Front textile: Mozaic 2 from Febrik / Kvadrat

Back side textile: -

## Simulated module build-up (from top to bottom):

3.3 mm	Front textile
100 mm	Air gap
	Concrete surface

## Simulation set up:


Flat arrangement, 100mm to the wall

No surrounding, enclosing frame

Simulation reproduces the standard ISO 354/11654 measurement - random incidence environment

Date of simulation: 03-03-20

Frequency [Hz]	$\alpha_s$ 1/3 octave	$\alpha_p$ octave
100	0.04	
125	0.08	0.10
160	0.13	
200	0.20	
250	0.29	0.30
315	0.41	
400	0.52	
500	0.63	0.65
630	0.73	
800	0.82	
1000	0.88	0.85
1260	0.88	
1600	0.71	
2000	0.57	0.65
2500	0.71	
3160	0.77	
4000	0.72	0.75
5000	0.76	

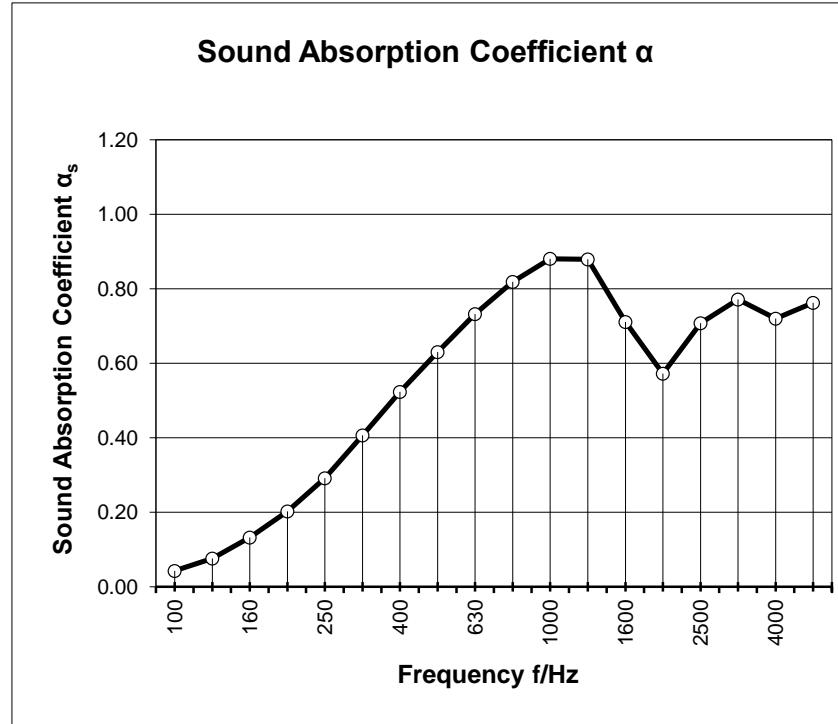

\*Method reproduces conditions, dimensions, build-up in a way results are comparable with measurements in reverberation chamber

as Sound absorption coefficient to ISO 354

NRC: 0.60

ap Practical sound absorption coefficient to ISO 11654

SAA: 0.61

Rating according to ISO 11654:

**Weighted Sound Absorption Coefficient  $\alpha_w = 0.6$  (MH)**

Sound absorption class: C

**kvadrat soft cells**

Test conducted by Kvadrat SoftCells  
 Poznańska 3, 62-023 Gądki