

Test Report

Report Number:
943758-2-TEX



**DANISH
TECHNOLOGICAL
INSTITUTE**

Gregersensvej 1
DK-2630 Taastrup
+45 72 20 20 00
info@teknologisk.dk
www.teknologisk.dk

Page 1 of 3
Init.: CHF/LELN
Order no.: 943758
Encl.: 2

Assignor: Kvadrat A/S, Lundbergsvej 10 , DK-8400 Ebeltoft

Material: Upholstery fabric. See enclosure A for detailed sample description.

Sampling: The assignor confirms having selected the product. The product was forwarded by the assignor and received at Danish Technological Institute on 11 September 2020.

Period: The test took place from 14 September 2020 to 21 October 2020.

Method: The test methods used are referenced in connection with the results. See enclosure B.

Test results: The results are shown in enclosure B.

Terms: This test was conducted accredited in accordance with international requirements (ISO/IEC 17025:2017) and in accordance with the General Terms and Conditions of Danish Technological Institute. The test results solely apply to the tested item. This test report may be quoted in extract only if Danish Technological Institute has granted its written consent.

Place: Danish Technological Institute, Taastrup, Building and Construction

Signature: This document is only valid with a digital signature from Danish Technological Institute. The date of issue appears from the digital signature.

Charlotte Fischer
Senior Consultant



DIGITALLY SIGNED DOCUMENT

20 October 2020

DANISH TECHNOLOGICAL INSTITUTE



DANAK

TEST Reg.no. 2



Sample


Description: Upholstery fabric

Designated: Crystal Field.

Fibre content: 38% new wool, 9% nylon, 53% Cotton. (as per info from the assigner).

Approximate mass per area unit: 560 g/m²

Photo:

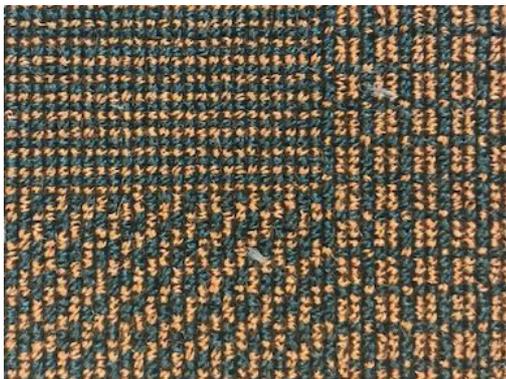



Results

Test of Upholstery fabric

Determination of fabric propensity to surface fuzzing and to pilling

Part 2: Modified Martindale method

EN ISO 12945-2:2000

1-5 scale, 5 best rating

Test conditions: 21°C, 65% RH

Pre-treatment	Test parameters	Results		
(none)	Number of test specimens: 3 Number of observers: 2 Abradant: Wool abradant fabric Loading mass: 415 g	Stage	Rubs	Grade
		1	500	4-5
		2	1000	4-5
		3	2000	4-5
		4	5000	4-5
		Final grade: 4-5 The final grading at 2000 rubs relates to fuzzing		