

Test Report

Report No.: A880006-3



**DANISH
TECHNOLOGICAL
INSTITUTE**


Gregersensvej
DK-2630 Taastrup
Tel. +45 72 20 20 00
Fax +45 72 20 20 19

info@teknologisk.dk
www.teknologisk.dk

Assignor: Kvadrat A/S
Lundbergsvej 10
8400 Ebeltøft
Attn.: Lone Henriksen

Page 1 of 1
LeIn/Chf
Order no.:880006
No. of appendices: 1

Subject: Upholstery fabric Parkland 151, Fibre content: 100 % Trevira CS (as per info from the assigner).

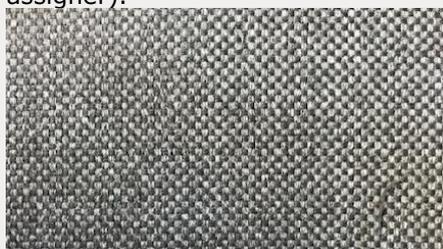

Sampling: The test material was sampled by the client and received at the Danish Technological Institute 02.07.2019

Method: See Appendix 1.

Period: The testing was completed 22.07.2019

Result: Individual results appear from Appendix 1.

Storage: The test material will be destroyed after 6 months, unless otherwise agreed.

Terms: The accredited test was carried out according to DANAK's general conditions see www.danak.dk and according to the General Terms and Conditions regarding Commissioned Work Accepted by the Danish Technological Institute, which apply at the time of signing the agreement. The test is only valid for the tested specimen. The test report may only be extracted, if the laboratory has approved the extract.

Date/place: 22.07.2019, Danish Technological Institute, Wood and Biomaterials, Textile, Taastrup

Signature: Test responsible

Co-signatory



Report no.: A880006-3
 Appendix: 1
 Page: 1 of 1
 Initials: LelN/Chf

Test Methods	Results				
<p>Determination of the slippage resistance of yarns at a seam in woven fabrics - Fixed load method DS/EN ISO 13936-2:2004 Performed on: Standard seam Load: 180 N Test conditions: 21°C, 65%RH</p>	<p>Average of 5 determinations</p> <table> <tr> <td>Seam parallel to warp:</td> <td>3 mm seam opening</td> </tr> <tr> <td>Seam parallel to weft:</td> <td>2 mm seam opening</td> </tr> </table>	Seam parallel to warp:	3 mm seam opening	Seam parallel to weft:	2 mm seam opening
Seam parallel to warp:	3 mm seam opening				
Seam parallel to weft:	2 mm seam opening				