

Investigation report

SAHCO GmbH
Frau Kemmerer
Kreuzburger Str. 17-19

90471 Nürnberg

DELCOTEX
Delius Techtex GmbH & Co. KG
Vilsendorfer Str. 50
33739 Bielefeld
Germany

Homepage: www.textillabor.eu

Contact: Erik Radl
Division: Laboratory
Phone: +49 (0) 52 06 / 91 07 - 52
Fax: +49 (0) 52 06 / 91 07 - 34

Date: 22.11.2018

Investigation report No. 18-E-582

Order description: Colour fastness to rubbing DIN EN ISO 105-X12 (2016-11)
Colour fastness to artificial light: Xenon arc fading lamp
DIN EN ISO 105-B02 (2014-11)

Test samples: Grid 2767

Sampling: by orderer

Orderer: see address

Date of order: 16.10.2018

Date of delivery: 18.10.2018

Date of testing: 16.11.2018

Number of pages: 7

Remark:

The results are valid only for the tested object. The accreditation applies for the methods listed in the annex to the certificate D-PL-17323-01-00. Accredited test methods are underlined. The valuations and Interpretations in the investigation report are not subject to accreditation. Tests conducted through co-operation partners are marked with °. The content of this investigation report will not be passed to third persons without written approval of the orderer. The partial publication of the test report, as well as the usage for commercial process, is only allowed with a permission of the DELCOTEX Delius Techtex GmbH & Co. KG.

Remnants of test material will be destroyed after 3 months. Previously stated specifications / data sheets / certificates are only characters and no warranties. Also no warranty in case of durability will be overtaken. Finally our general delivery and payment conditions are valid (please see www.textillabor.eu).

Investigation report No. 18-E-582

page 2 of 7

Instructions for performing

1. Method: Colour fastness to artificial light: Xenon arc fading lamp
DIN EN ISO 105-B02 (2014-11)

2. Measuring conditions:

Tester: Atlas Xenotest alpha LM
 Light: Xenon arc beam
 Filtering system: Typ 7
 Pick and placement cycling: 170 h – until Mark 6

Test results

Sample / Colour	Mark*
Grid, 2767-01, 56%PES/44%CO	6
Grid, 2767-02, 56%PES/44%CO	5-6
Grid, 2767-03, 56%PES/44%CO	5-6
Grid, 2767-04, 56%PES/44%CO	6
Grid, 2767-05, 56%PES/44%CO	6
Grid, 2767-06, 56%PES/44%CO	5-6
Grid, 2767-07, 56%PES/44%CO	6
Grid, 2767-08, 56%PES/44%CO	>6
Grid, 2767-09, 56%PES/44%CO	>6
Grid, 2767-10, 56%PES/44%CO	5-6
Grid, 2767-11, 56%PES/44%CO	5-6
Grid, 2767-12, 56%PES/44%CO	6
Grid, 2767-13, 56%PES/44%CO	6
Grid, 2767-14, 56%PES/44%CO	5-6

Investigation report No. 18-E-582

page 3 of 7

Test results

Grid, 2767-15, 56%PES/44%CO	5-6
Grid, 2767-16, 56%PES/44%CO	>6
Grid, 2767-17, 56%PES/44%CO	>6
Grid, 2767-18, 56%PES/44%CO	6
Grid, 2767-19, 56%PES/44%CO	6
Grid, 2767-20, 56%PES/44%CO	6

* The results based on using the blue scale.

Note 1 = intense colour change

Note 8 = no colour change


Investigation report No. 18-E-582

Appendix

Methode: Colour fastness to rubbing DIN EN ISO 105-X12 (2016-11)

Article: Grid, 2767-01, 56%PES/44%CO
warp

dry

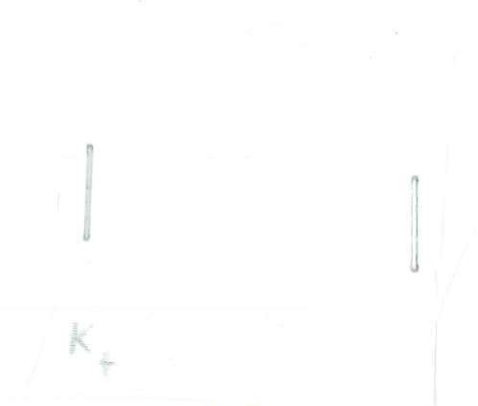

Mark* 4-5

wet



Mark* 4-5


weft

dry



Mark* 4-5

wet

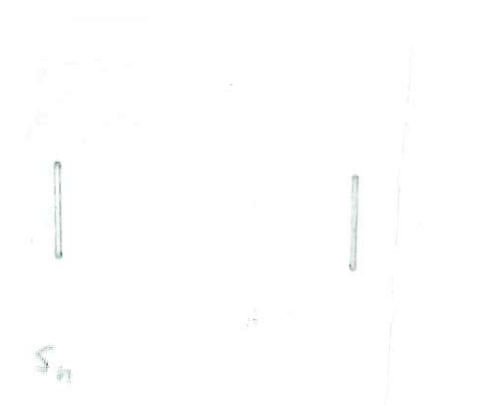

Mark* 4-5

* The results based on using the gray scale.
Note 1 = intense colour change
Note 5 = no colour change