

Test Report

Report Number:
145015-3-TEX



**DANISH
TECHNOLOGICAL
INSTITUTE**

Gregersensvej 1
DK-2630 Taastrup
+45 72 20 20 00
info@teknologisk.dk
www.teknologisk.dk

Page 1 of 3
Init.: CHF/LELN
Order no.: 145015
Encl.: 0

Assignor: KVADRAT A/S, Lundbergsvej 10, DK-8400 Ebeltoft

Material: Sample of upholstery fabric designated: Steelcut Beat. See page 2 for detailed sample description.

Sampling: The assignor confirms having selected the product. The product was forwarded by the assignor and received at Danish Technological Institute on 23 June 2022.

Period: The test took place from 24 June 2022 to 7 July 2022.

Method: The test methods used are referenced in connection with the results. See page 3.

Test results: The results are shown from page 3 onwards.

Terms: This test was conducted accredited in accordance with international requirements (ISO/IEC 17025:2017) and in accordance with the General Terms and Conditions of Danish Technological Institute. The test results solely apply to the tested item. This test report may be quoted in extract only if Danish Technological Institute has granted its written consent.

Place: Danish Technological Institute, Taastrup, Environmental Technology

Signature: This document is only valid with a digital signature from Danish Technological Institute. The date of issue appears from the digital signature.

Charlotte Fischer
Senior Consultant



DIGITALLY SIGNED DOCUMENT

7 July 2022

DANISH TECHNOLOGICAL INSTITUTE



DANAK


TEST Reg.no. 2



Sample

Description: Sample of upholstery fabric
Designated: Steelcut Beat
Fibre content: 100% recycled polyester
Approximate mass per area: 446 g/m²

Photo:

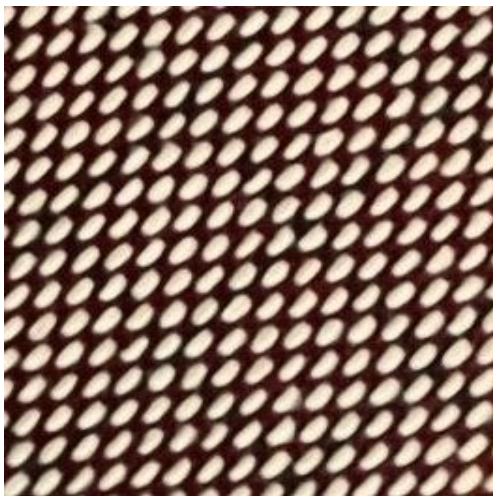



Results

Test of Sample of upholstery fabric designated: Steelcut Beat

Determination of the slippage resistance of yarns at a seam in woven fabrics - Fixed load method

EN ISO 13936-2:2004

Test conditions: 21°C, 65% RH

Performed on	Load [N]	Seam parallel to warp	Seam parallel to weft
Standard seam	180	2.5 mm seam opening <i>Average of 5 determinations</i>	1 mm seam opening <i>Average of 5 determinations</i>
